




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H01F 7/06	A2	(11) International Publication Number: WO 99/14768 (43) International Publication Date: 25 March 1999 (25.03.99)
(21) International Application Number: PCT/SE98/01564 (22) International Filing Date: 2 September 1998 (02.09.98) (30) Priority Data: 9703198-3 4 September 1997 (04.09.97) SE (71) Applicant (for all designated States except US): SWEDISH CONTROL SYSTEMS AB [SE/SE]; Industrigatan 16, S-662 34 Åmål (SE). (72) Inventor; and (75) Inventor/Applicant (for US only): OLSSON, Johan [SE/SE]; Nygårdsvägen 20, S-662 34 Åmål (SE). (74) Agent: FURHEM, Hans; Mecel AB, P.O. Box 73, S-662 22 Åmål (SE).		(81) Designated States: CN, DE, JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>In English translation (filed in Swedish). Without international search report and to be republished upon receipt of that report.</i>

(54) Title: DOUBLE-ACTING ELECTROMAGNETIC ACTUATOR

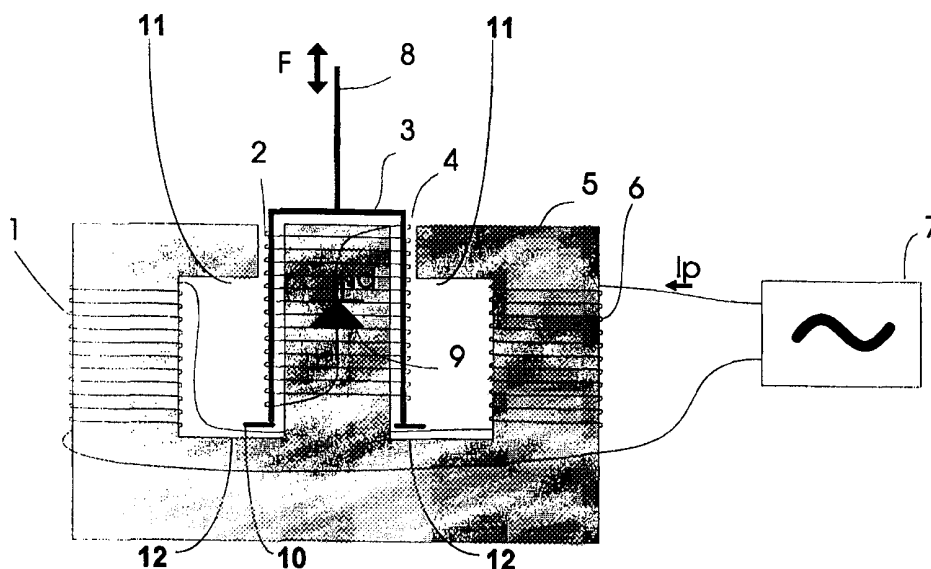

(57) Abstract

The invention relates to an electromagnetic actuator for a rapid linear motion with a limited length of stroke. The electromagnetic actuator includes a stationary arranged first coil (1, 6) and a second movable coil (2), with the winding of the stationary coil connected to controllable power source (7) and the winding of the movable coil is short-circuited without any galvanic connection to an external power source. The ends of the winding of the movable coil of the electromagnetic actuator is short-circuited via a rectifier element (9), preferably a diode. The diode allows a current to be developed in one direction only in the winding of the second coil, said current being induced from an electromagnetic field generated by a current through the first coil. In this manner is a double-acting electromagnetic actuator with very low weight obtained, resulting in very rapid response and high reliability, due to the lack of any external electrical connections to the movable coil.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

DOUBLE-ACTING ELECTROMAGNETIC ACTUATOR

Present invention relates to an electromagnetic actuator having a rapid linear motion with a moderate length of stroke according to the preamble of claim 1.

5

STATE OF THE ART

It is previously known with coils being movable under the influence of magnetic fields. Such an example could be found in loud speakers with stationary permanent magnets having a movable voice coil arranged in the magnetic field induced by the permanent magnet. The winding of the voice coil is connected to an external power source, and by current control could the coil be given the intended motion. A drawback with this solution is that the external connections are movable and subjected to a potential interruption.

In US,A,5294850 is further known a device wherein an electromagnetic field-effect could launch missiles. In this solution is a stationary coil used, which could affect a coil arranged on or in contact with the missile to be launched. The movable coil is lacking any external connections and the winding is short-circuited, or alternatively divided into several coil segments, and wherein the electromagnetic field is controlled by the current in the stationary coil.

In US,A,1066081 is shown in an alternative embodiment, i.e. figures 4 and 5, a relay having a stationary and a movable coil. The winding of the movable coil is connected to a stationary circuit breaker, and the movable coil is affected in a controlled manner in one direction by said circuit breaker and the magnetic field induced from the stationary coil.

A conventional solution, in order to obtain a double-acting actuator, utilise a stationary solenoid and a movable iron core, which iron core is forced towards a first end position using a return spring.

When the iron core is to be activated towards the second end position, then the force from the electromagnetic field must overcome the counteracting force from the return spring and initiate movement of the mass of the iron core. This will bring about a decrease in response, due to the rather large mass of the actuator and need to overcome the force from the return spring.

OBJECT OF THE INVENTION

The object of the invention is to obtain an electromagnetic actuator useful for most situations where a double acting and rapid movement with a moderate length of stroke is requested.

Another object is to obtain an electromagnetic actuator with a quick response.

Yet another object is to obtain an electromagnetic actuator lacking any electrical connections to the movable part of the electromagnetic actuator.

35

An object with a further refined embodiment is to be able to obtain a feed-back signal of the position of the actuator, whereby an improved control with increased accuracy of movement of the actuator could be obtained.

5 SHORT DESCRIPTION OF THE INVENTION.

The inventive electromagnetic actuator is distinguished by the characterising part of claim 1.

By the inventive electromagnetic actuator could a double acting electromagnetic actuator be obtained with less dead weight of all moving parts and which will give a rapid response of the
10 actuator. The electromagnetic actuator will also exhibit a lack of any electrical connections to the movable part, which will give a high order of reliability.

Other distinguishing features and advantages of the invention will be evident from the characterising parts of other claims, and following description of embodiments, The description of embodiments are made by reference to figures from following list of figures.

15

LIST OF FIGURES

Figure 1, shows in a side view an inventive electromagnetic actuator,

Figure 2 shows the electromagnetic actuator in figure 1 as seen from above,

Figure 3a, 3b and 3c shows respectively the current through the stationary coil, the current through
20 the movable coil and the force induced by the movable coil,

Figure 4, shows an analogue circuit for detection of the position of the movable coil,

Figure 5, shows an alternative solution for the actuator.

DESCRIPTION OF EMBODIMENTS

25 In figure 1 is shown the inventive electromagnetic actuator. A stationary coil 1,6 is wound upon a core 5, preferably a ferrite-core. In this embodiment is the stationary coil divided into two coil segments connected serially, each wound around one leg of the core having two legs in parallel.

In an alternative embodiment could the core be manufactured by laminated sheet metal. But a ferrite-core, even though more expensive, is preferred.

30 A controllable power source 7 is connected to the stationary coil, controlling the current I_p through the stationary coil.

A coil 2 movable in relation to the stationary coil, is wound on a coil former 3. The coil former is preferably guided by a third leg of the core 5, which third leg is in parallel with the legs upon which the stationary coil is wound, and said third leg located between these two legs.

35 The coil former and the coil wound thereupon is located in an air gap 4 between the two legs of the stationary coil.

In order to retain the movable coil on the coil guiding leg of the core, is the coil former 3 equipped with a flange 10 at the lower part thereof as shown in figure 1. The upper and lower surface of the flange 10 acts as a first and second stop lug, each interacting with a first and second stop lug respectively of the core. The first stop lug 11 of the core is formed by two radially and inwardly directed protrusions of the core legs, upon which the core segments are wound. The first stop lugs 11 limiting the movement of the movable coil in a first protruded position.

The second stop lug 12 of the core is limiting the movement of the movable coil in a second retracted end-position of the movable coil 2 in relation to the stationary coil 1,6.

In the embodiment shown is the coil former cylindrical, apparent in figure 2, and with an integrated actuator arm 8. The coil former could alternatively also be given other shapes, for example with a rectangular or polygonal cross sections without departing from the invention. .

The coil wound at the movable coil former is short-circuited via a diode 9, which diode only conducts current in one direction. This diode could be substituted with any equivalent type of component, which component only will conduct current in one direction in the second movable coil, which current is induced from an electromagnetic field generated by current through the first and stationary coil.

The function of the electromagnetic actuator is described in detail with reference to the current- and force-graphs shown in figure 3a-3c as a function of time. This principle graphs have been obtained after a practical tests of an embodiment corresponding to the embodiment shown in figure 1. In figure 3a is shown the current I_p through the stationary coil 1,6, which current is controlled in an conventional manner via the connected power source 7.

In figure 3b is shown the current through the movable coil 3, which current is induced by the electromagnetic field generated by the stationary coil. In figure 3c is shown the force F obtained at the actuator-arm 8, when the movable coil 2 is influenced by the magnetic field in the air-gap 4.

In the embodiment shown is defined a first "pull cycle", corresponding to a movement of the movable coil inwards, i.e. in a downward direction in figure 1. At start of the pull-cycle is the current I_p initiated in the stationary coil 5,6, which generates a magnetic field that in turn will induce a current I_d in the movable coil 4. The current in the stationary coil reaches its maximum value at the point of time A, at which time also the current in the movable coil and the force obtained from the actuator arm 8 reaches maximum values respectively. Shortly after the point of time A is initiated a reduction of the current I_p through the stationary coil. The reduction will result in that also the current through the movable coil will decrease. The force F developed will follow the equation;

$$F = B \cdot I_d \cdot L,$$

where B is the strength of the magnetic field and L the length of the conductor located in the magnetic field, and where a force is developed during the entire cycle.

In order to maintain a continuous application of a force towards the retracted position, is this sequence repeated continuously. In the figure is however only two sequences during the pull cycle shown.

5 In the "push-cycle", corresponding to a movement of the movable coil outwards, i.e. in a upward direction in figure 1, is a current initiated in the stationary coil in the reversed direction. This current will generate a magnetic field having an opposite direction in relation to the pull-cycle, and which magnetic field is likely to induce a current in the movable coil when the field and current declines. Immediately after the point of time B is the current through the stationary coil subject to
10 decrease, whereby the magnetic field starts to induce a current through the movable coil in the same direction as the current induced during the pull-cycle. A force F , following the same force equation as mentioned earlier ($F = B \cdot I_d \cdot L$), is obtained, and directed in the opposite direction in relation to the pull-cycle, due to the change of sign of B . In the figure is however only two sequences during the push-cycle shown.

15 Tests have also proven that a determination of the position of the movable coil could be made by detection of Φ , see figure 3, which corresponds to dI_p/dt , i.e. the first order derivative value of the current through the stationary winding. The parameter Φ decreases with decreasing exposure of the movable coil in the magnetic field. This determination of position could preferably be
20 performed by means of conventional analogue circuitry.

In figure 4 is shown in principle such a basic analogue circuitry. In this embodiment is used a simple operational amplifier OP, which is connected through the resistance R and the capacitor C such that the input signal I_p will produce the output signal dI_p/dt . In practical implementations will
25 the circuitry require some supplementing logic in order to obtain a correct analysis and sampling of the signal.

The inventive electromagnetic actuator could also in a further improved embodiment be controlled as of position, where the processed signal of position is used as a feed-back signal of the position.
30 By modulation of the pulse-width during the pull- and the push-cycle, could the actuator be imparted any arbitrary position between the two end positions.

In order to ensure that a predetermined lowest order of force shall be obtained from the actuator, could the current I_p through the primary coil be controlled at a higher level in terms of absolute
35 value, i.e. at a level where I_p is not allowed to be reduced to a zero-level. This could contribute to an improved efficiency.

The invention could within the scope of the claims be modified in a number of ways. As an example could the core be given another shape and the stationary coil could have only one coil segment. In figure 5 is an example of an embodiment adapted for production, where the primary winding 6' is wound upon the centre leg of the coil 5', concentric with the secondary winding 2'.

- 5 This embodiment will give an improved transformer coupling, where the core could be given a form axially symmetrical in relation to axis X. At the same time is the primary winding 6' given a improved protective enclosure.

- 10 In case of an implementation in power demanding applications, could the rectifier element be replaced by MOSFET technology, in order to reduce any power losses through the rectifier element. By implementation of MOSFET technology could the potential drop in the conducting direction be reduced from an order of 0.7 volts to only a fraction thereof.

CLAIMS

1. Electromagnetic actuator for a rapid linear motion with a limited length of stroke, with a stationary arranged first coil (1,6) and a second movable coil (2), wherein the winding of the stationary coil is connected to controllable power source (7) and the winding of the movable coil is short-circuited without any galvanic contact with external power sources characterised in that the ends of the winding of the movable coil are short-circuited via a rectifier element (9), which rectifier element only allows current to be developed in one direction in the winding of the movable coil, which current in the movable coil is induced from an electromagnetic field generated by a current through the stationary coil (1,6).
2. Electromagnetic actuator according claim 1 characterised in that the rectifier element (9) is a diode, preferably a diode of a semiconductor type.
3. Electromagnetic actuator according claim 1 or 2 characterised in that the first coil is wound upon a core (5), preferably a ferrite-core, and wherein the second movable coil is arranged upon a coil former (3) which in turn is arranged with an air gap to and guided by a protrusion of the core.
4. Electromagnetic actuator according claim 2 characterised in that the rectifier element (9) which rectifies the current of the movable coil is arranged integrated with the coil former (9) and the winding of the movable coil.
5. Electromagnetic actuator according claim 4 characterised in that the coil former (3) upon which the second movable coil is firmly arranged, also includes an integrated actuator arm (8).
6. Electromagnetic actuator according claim 5 characterised in that the coil former (3) includes a first and second stop lug (10) which in cooperation with a first and second stop lug respectively upon the core (11,12 respectively), will limit the movement of the movable coil between a first and second end position in relation to the first stationary coil.
7. Electromagnetic actuator according any of preceding claims characterised in that the winding of the first coil of the actuator is connected to detection means (C,R,OP) by which a detection of a value corresponding to the speed of change of the current I_p , through the winding could be made, which value, i.e. dI_p/dt , is used for purposes of determination of the position of the coil of the actuator.

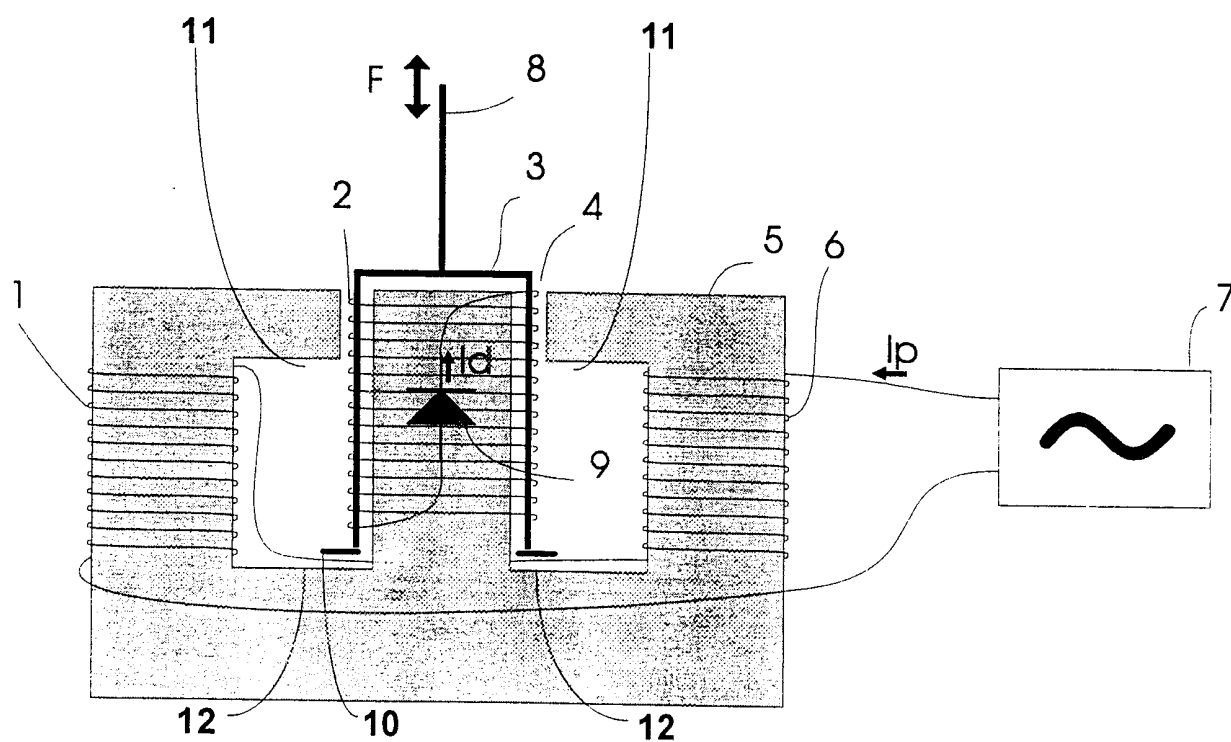


FIG 1

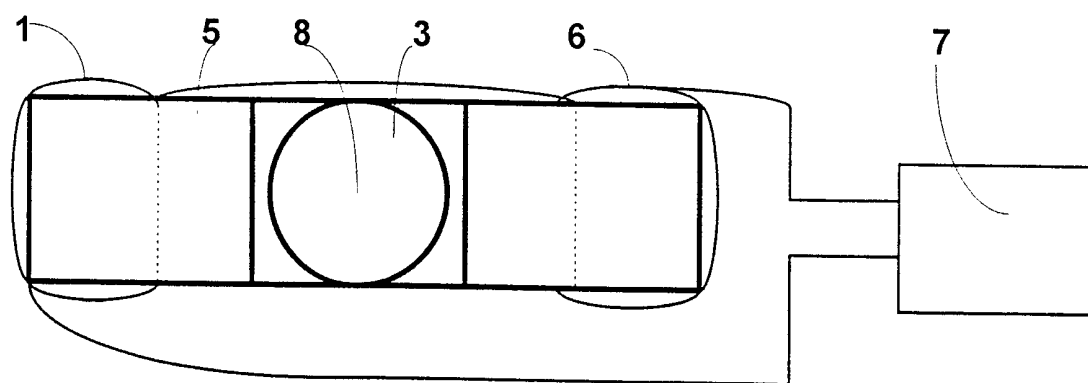


FIG 2

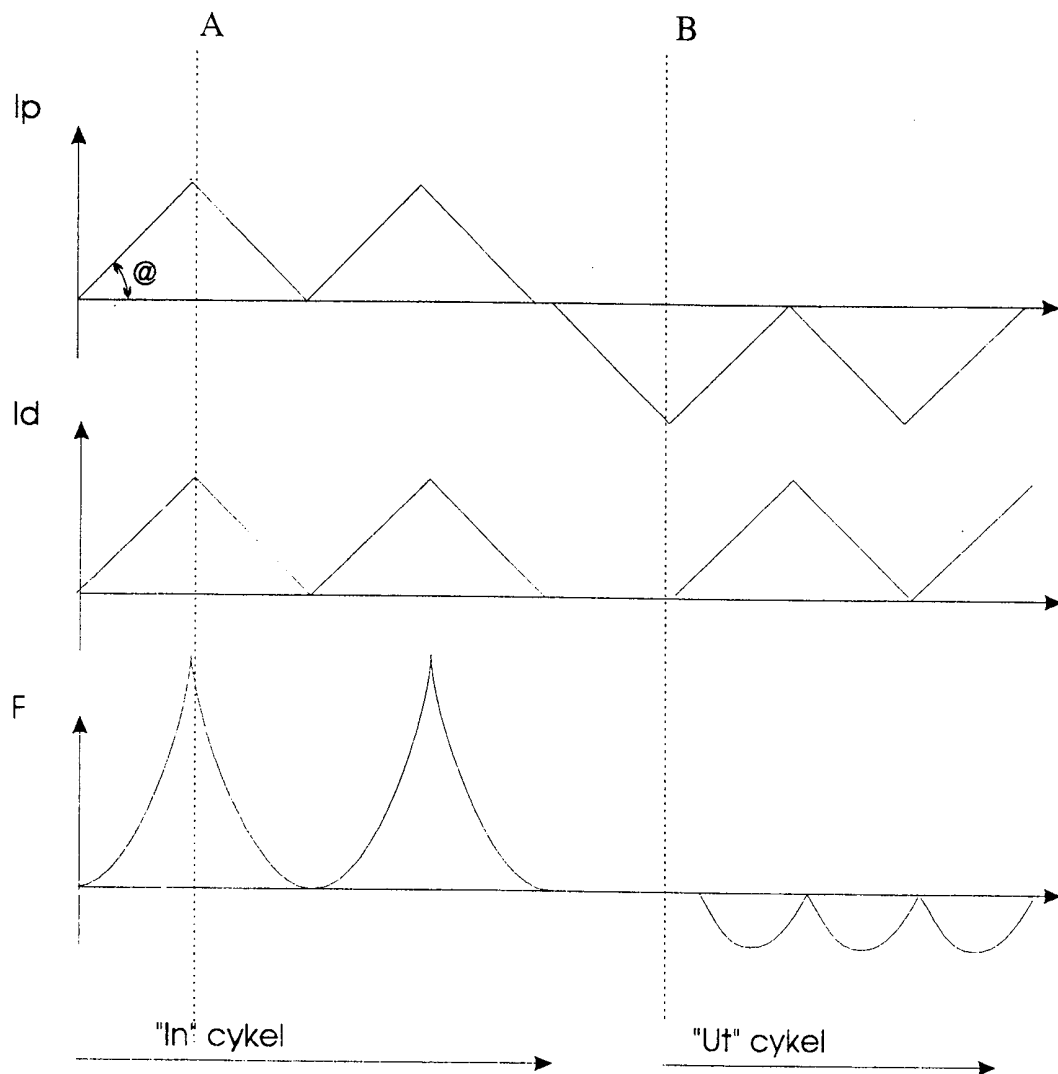


FIG 3a-3c

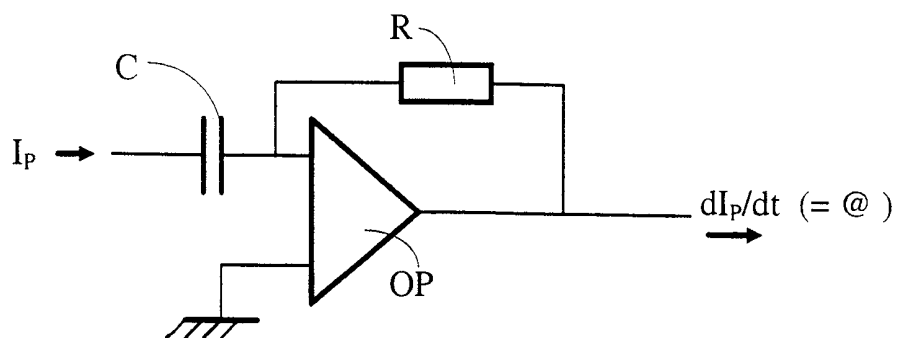


FIG 4

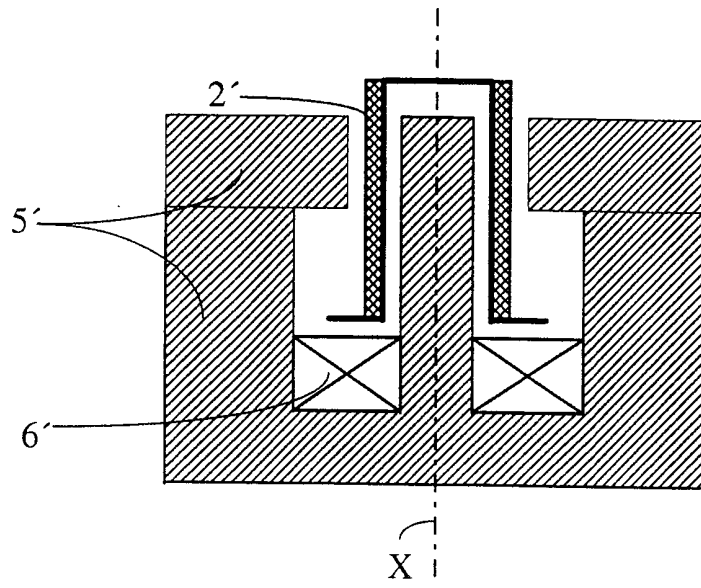


FIG 5